GEIGER

Right ON SITE

Installation Principles

ROS-WBHF Ward Bennett H Frame Credenza


1B93V3


Parts List

Tools Required

- o 4' level
- o 3/16" Hex Wrench
- o Cordless Drill
- o Drill bits:
 - o #2 Robertson
 - o #3 Phillips

Assembled H-Frame Credenza (Configuration and number of sections varies)



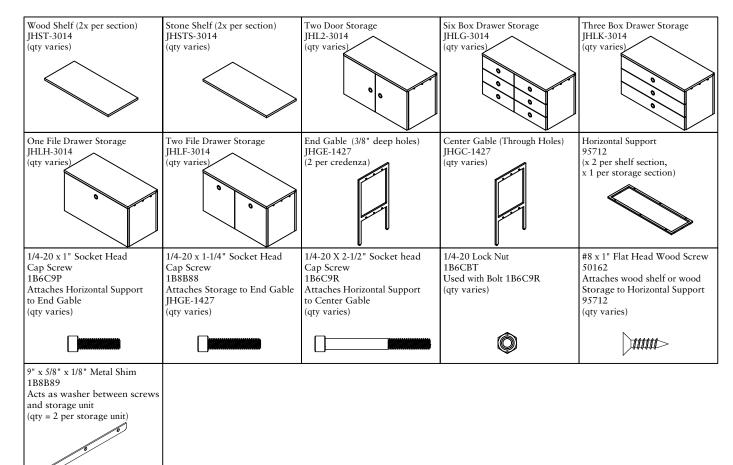

GEIGER

Right ON SITE


Installation Principles

ROS-WBHF Ward Bennett H Frame Credenza

1B93V3

Assemble Frames

A. Assemble frames as shown below, but do not fully tighten to allow placement of storage/shelf elements later. Assemble with gables resting with their backs on a protected surface. Use a 3/16" Hex wrench to drive bolts into threaded holes in gables. Make sure chamfered side of screw holes on horizontal supports are on the bottom.

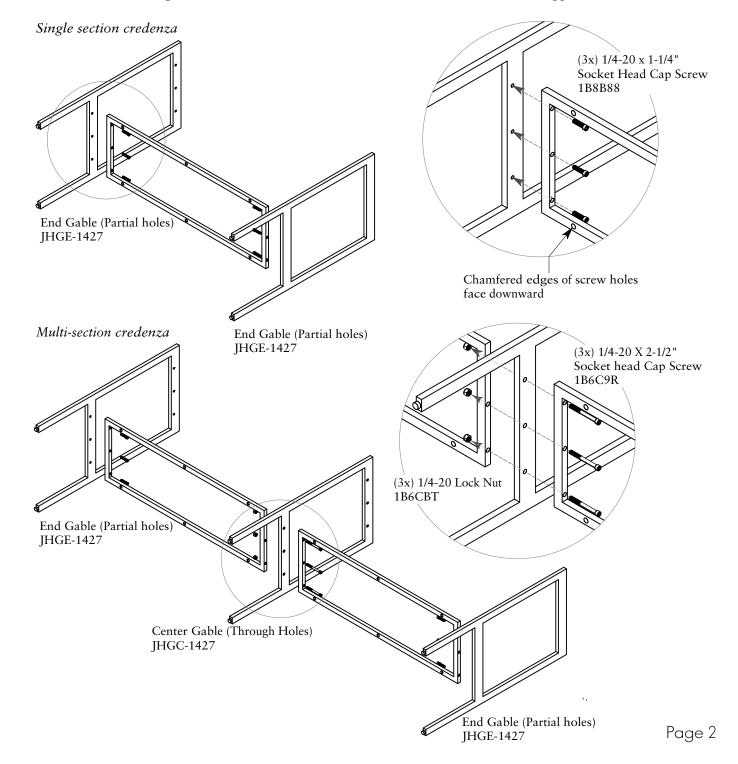

GEIGER

Right ON SITE


Installation Principles

ROS-WBHF Ward Bennett H Frame Credenza

1B93V3

2. Assemble Shelves and Storage

- A. Carefully flip assembled frame upright and place in final location.
- B. Place lower shelves and storage cabinet(s) onto lower horizontal supports, make sure they are aligned in the front and back with gables.
- C. Fully tighten bolts connected in step 1.
- D. Remove drawers from storage cabinets to allow access to bolt holes on interior of cabinet.
- E. Bolt storage cabinet(s) and upper horizontal supports to gables as shown.

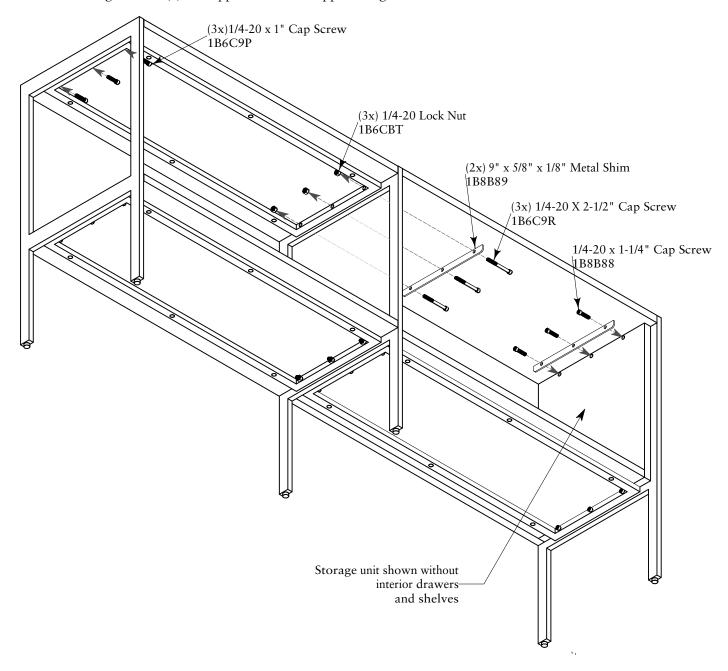

GEIGER

Right ON SITE

Installation Principles

ROS-WBHF Ward Bennett H Frame Credenza

1B93V3

3. Fasten Shelves and Storage to Horizontal Supports

- A. Fasten shelves and storage unit(s) to horizontal supports using #8 x 1" (50162) wood screws.
- B. Replace drawers and shelves in storage unit.
- C. Level assembled H-Frame credenza.

